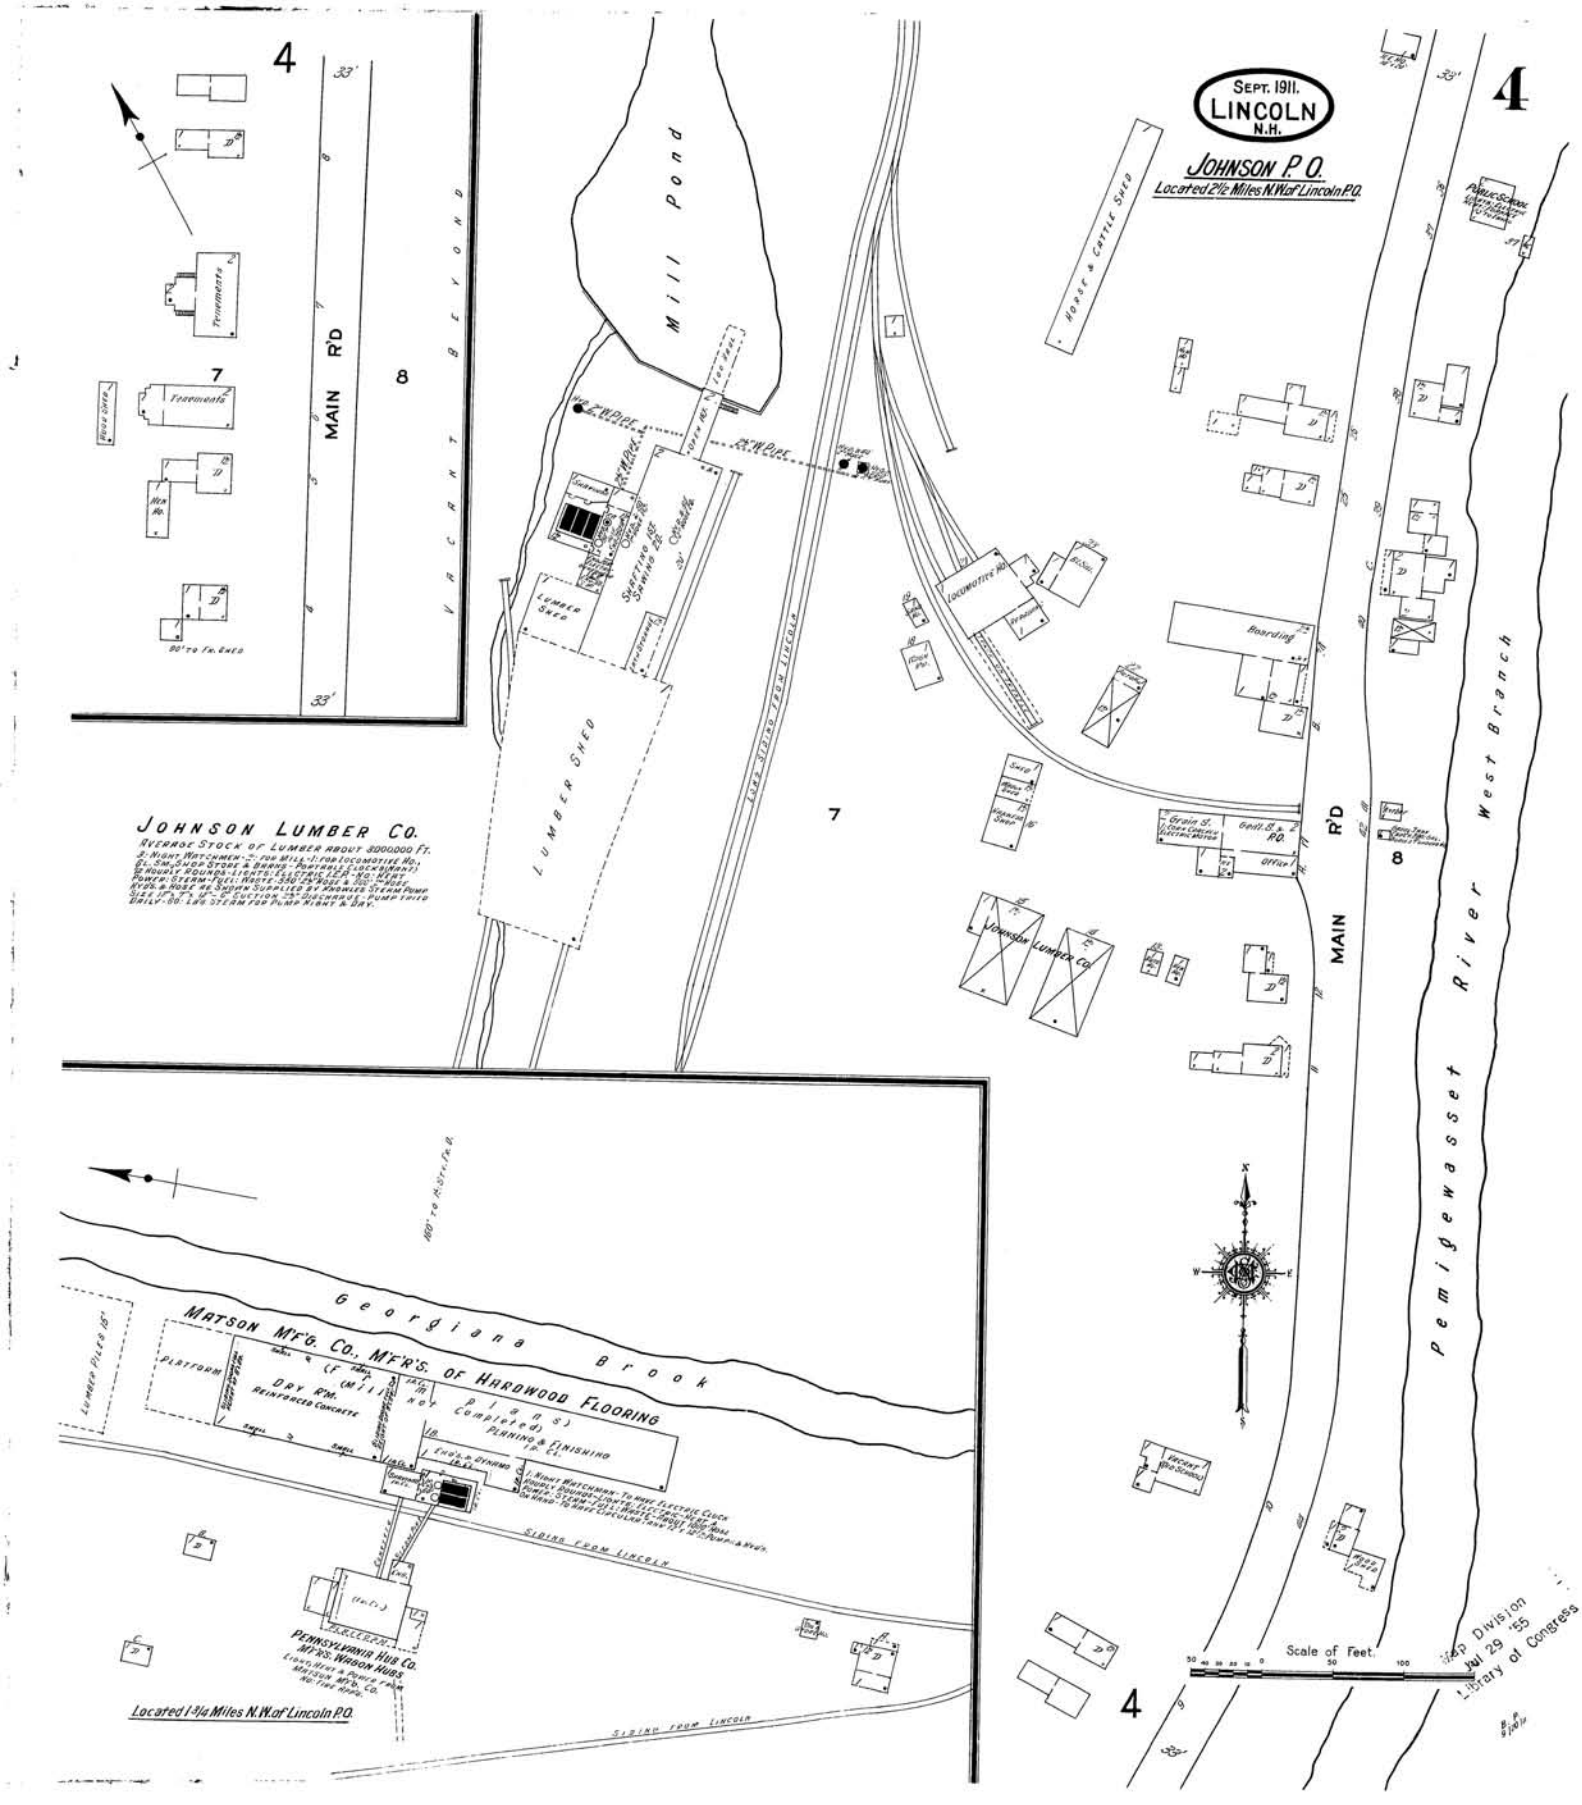

SEPT. 1911.
LINCOLN
N.H.
JOHNSON P.O.
Located 2½ Miles N.W. of Lincoln P.O.
4
Mill Pond
Horse & Cattle Shed
Locomotive Ho.
Boarding
Lumber Shed
Shafting 1st Shaving 2d
Lumber Shed
Long Siding from Lincoln
Johnson Lumber Co.
Grain St.
Gen'l. S. & P.O.
Office
Main R'D
Pemigewasset River West Branch
Vacant Beyond
Tenements
Hen Ho.
Hogs Shed
90' to Fr. Shed
7
8
33'
JOHNSON LUMBER CO.
AVERAGE STOCK OF LUMBER ABOUT 3,000,000 FT.
3: NIGHT WATCHMEN - 2: FOR MILL - 1: FOR LOCOMOTIVE HO.
BL. SM. SHOP STORE & BARNS - PORTABLE CLOCK (NAN'T)
12 HOURLY ROUNDS - LIGHTS: ELECTRIC I.E.P. - NO: HEAT
POWER: STEAM - FUEL: WASTE - 350 LBS. HOSE & 500' - HOSE
KYDS. & HOSE AS SHOWN SUPPLIED BY PHOENIX STEAM PUMP
SIZE 18" x 7" x 18" - 6" SUCTION 2½" DISCHARGE - PUMP TRIED
DAILY - 80: LBS. STEAM FOR PUMP NIGHT & DAY.
Georgiana Brook
MATSON M'F'G. CO., M'F'R'S. OF HARDWOOD FLOORING
(Mill not Completed)
PLATFORM
DRY R'M.
REINFORCED CONCRETE
PLANING & FINISHING
LUMBER PILES 15'
SIDING FROM LINCOLN
PENNSYLVANIA HUB CO.
M'F'R'S. WAGON HUBS
Located 1¾ Miles N.W. of Lincoln P.O.
Scale of Feet.
Map Division
Jul 29 '55
Library of Congress